

PIUSI EX50 PUMP KIT 12V DC 50LPM F0037501A

F0037501A

FLUID COMPATIBILITY

Diesel

Petrol

ATEX-certified 12V DC pump kit delivering 50 L/min with integrated meter, auto nozzle, and telescopic suction tube. Built for mobile diesel or petrol transfer in hazardous-area applications.



FEATURES

- Flow rate 50 L/min
- 12V DC operation
- ATEX, UL, IECEx certified
- K33 mechanical meter included
- Auto shut-off nozzle
- Telescopic suction tube
- 4m delivery hose
- Diesel or petrol compatible

BENEFITS

- Meets zone-classified site requirements without exemption paperwork
- Complete kit, no hunting for compatible parts
- Auto nozzle prevents spills and overfills
- Telescopic tube fits standard drums and bulk tanks
- 12V suits most fleet battery systems

TECHNICAL SPECIFICATIONS

Flow Rate	50 L/min
Voltage	12V
Weight	15.2 kg
Hose Length	4m length
Included Meter	K33 mechanical totaliser

Auto Nozzle	shuts off when tank is full
Certifications	ATEX
Telescopic Suction Tube	adjusts to drum or tank depth
Fluid Compatibility	diesel or petrol

USE CASE & APPLICATION

- Mine site diesel bowzers
- Fleet refuelling in hazardous areas
- Mobile petrol transfer on construction sites
- Workshop drum pumping with zone compliance
- Agricultural diesel dispensing



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

EX50 DRUM

FEATURES

- STURDY STRUCTURE
- FLANGED COMPONENTS
- ANTI-NOISE FILTER
- THERMAL PROTECTION
- BUILT-IN BYPASS VALVE
- SUCTION PIPE WITH INTEGRATED FILTER
- UL LISTED VERSION AVAILABLE

The PIUSI EX50 DRUM is a complete pump transfer kit expressly engineered for ATEX/IECEx areas. This system is composed of a high-efficiency pump, manual or automatic nozzle and a telescopic suction hose. Thanks to the flanged components, this transfer set allows users to replace any component without using sealants thus creating maximum versatility and adaptability to any kind of condition. K33 mechanical meter available on request. Upon request it is available with different voltages and 60 Hz frequency.



PIUSI EX50 DRUM WITH METER AND FILTER

PERFORMANCE

UP TO
50 L/MIN

FLOW RATE

1100 MM

SUCTION PIPE

±1%

ACCURACY

10µm (85%)

FILTERING CAPACITY



EX50 DRUM WITH AUTOMATIC NOZZLE



EX50 DRUM WITH MANUAL NOZZLE

OUR PUMPS COMPLIES WITH THE FOLLOWING MARKING ATEX/IECEx

II	2	G	Ex	d	IIA	T4	Gb
GROUP	CATEGORY	TYPE OF EXPLOSIVE ATMOSPHERE	PERMANENT PREFIX	PROTECTION METHOD	GAS GLASS	TEMPERATURE CLASS	EQUIPMENT PROTECTION LEVEL

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
WITHOUT METER					
FO0372000	10	22	600X400X290	23,6X13,7X11,4	1
FO0372010	10	22	600X400X290	23,6X13,7X11,4	1
FO0372020	7,9	17,4	345X175X225	-	1
WITH METER					
FO037500A	12	22	600X400X290	23,6X13,7X11,4	1
FO037501A	12	22	600X400X290	23,6X13,7X11,4	1





FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

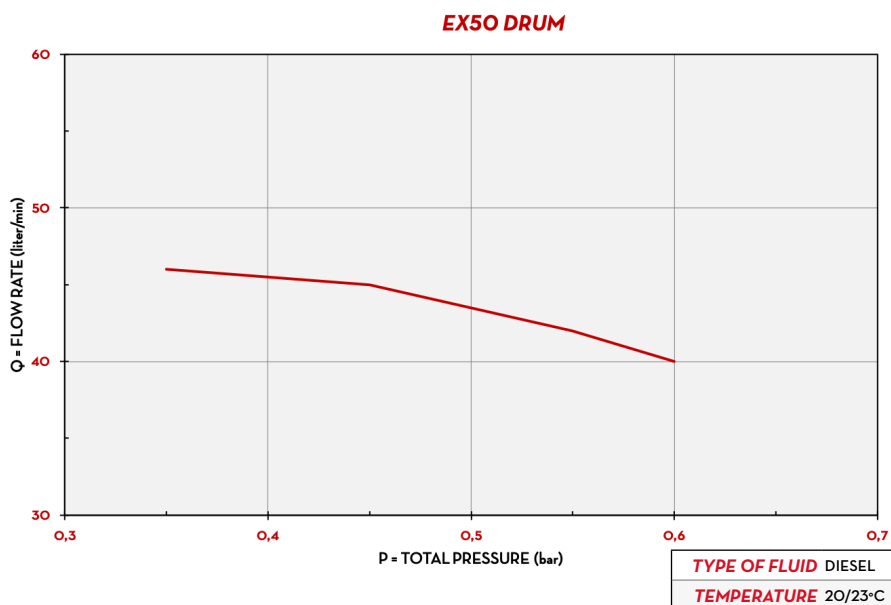

DIMENSIONS

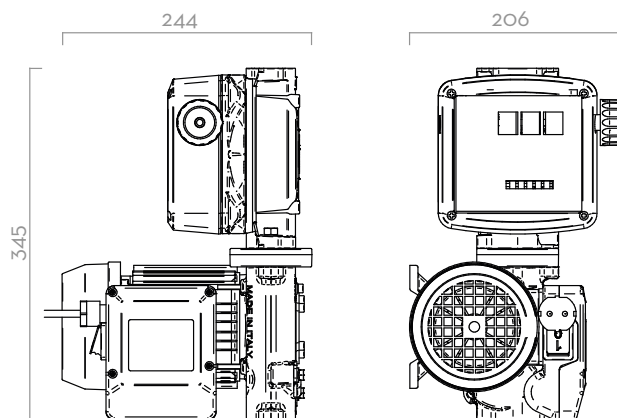

Dimensions expressed in millimeters

IN THE BOX

- EX50 PUMP
- TELESCOPIC SUCTION PIPE
- DELIVERY HOSE
- GASOLINE FILTER
- A60 ATEX NOZZLE
- 2" CONNECTOR
- K33 ATEX METER (ON SELECTED VERSION)
- INSTRUCTION MANUAL

DETAILS



2" CONNECTOR



INTEGRATED FILTER



BENDING PROTECTION

COMPONENTS

- **PUMP:**
EX50
- **METER:**
K33 ATEX
- **NOZZLE:**
A60 ATEX
SELF3000
- **FILTER:**
GASOLINE FILTR

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			METER	NOZZLE	FILTER	INLET	HOSE	
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	TYPE		BSP	LENGTH MM	Ø
WITHOUT METER													
FO0372000	DRUM EX50 12V DC ATEX + MAN. NOZZLE		50	13	12	250	21	-	SELF3000	YES	1"	4	3/4"
FO0372010	DRUM EX50 12V DC ATEX + AUT. NOZZLE		50	13	12	250	21	-	A60	YES	1"	4	3/4"
FO0372020	KIT DRUM EX50 12V DC ATEX		50	13	12	250	21	-	NO	NO	1"	-	-
WITH METER													
FO037500A	DRUM EX50 12V DC K33 ATEX + MAN. NOZZLE		50	13	12	250	21	K33	SELF3000	YES	1"	4	3/4"
FO037501A	DRUM EX50 12V DC K33 ATEX + AUT. NOZZLE		50	13	12	250	21	K33	A60	YES	1"	4	3/4"

(*) AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCIES. COMPATIBLE FLUIDS: DIESEL, KEROSENE, PETROL, PETROL/ALCOHOL MIXTURE UP TO 15%, AVGAS 100/100LL (PUMP AND FLOW METER ONLY), JET A/A1 (PUMP AND FLOW METER ONLY), ASPEN 2/4