

PIUSI AUTOMATIC NOZZLE A60 WITH SWIVEL DIESEL 70LPM F00603060

F00603060

Auto shut-off diesel nozzle with swivel, 60 L/min flow. Aluminium body, Viton seals, 1" BSP connection. Suits ute tanks and workshop dispensers.



FEATURES

- Automatic fuel nozzle
- 3 position stay open latch
- For non-resale refuelling applications

TECHNICAL SPECIFICATIONS

Flow Rate	70ltr Per Min	Spout OD (mm)	24
Flow Rate (lpm)	10-70	Includes	1" F BSP Swivel
Max Pressure (Bar)	3.5		

USE CASE & APPLICATION

- Ute tank refuelling
- Workshop diesel dispensing
- Farm equipment fuel transfer
- Small fleet top-ups



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

A60 / A80 / A120 / A140

FEATURES

- AUTOMATIC
- READY TO USE
- STURDY DESIGN

Among the range of nozzles for fuel dispensing, PIUSI A60/A80/A120/A140 consist of a range of automatic devices for flow rates up to 140 l/min fitted with an inner device that automatically stops the fluid dispensing when the tank is full. These nozzles also include a swivel connector.

PERFORMANCE

UP TO

140 L/MIN

FLOW RATE

1" BSP

INLET

A60

20/24MM

SPOUT

A80/A120/A140

29MM

SPOUT



PACKAGING

CODE		WEIGHT		PACKAGING			BOXES/EUROPALLET	
WITHOUT SWIVEL	WITH SWIVEL	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
A60								
-	FOO603060	1,25	2,76	36OX36OX280	14X14X11	1	-	-
-	FOO602020	1,20	2,65	36OX36OX280	14X14X11	1	-	-
-	FOO613A00	1,30	2,87	36OX36OX280	14X14X11	1	-	-
A80								
-	FOO604030	1,93	4,25	36OX36OX280	14X14X11	1	-	-
A120								
-	FOO610020	1,93	4,25	36OX36OX280	14X14X11	1	-	-
-	FOO614A00	1,65	3,64	36OX36OX280	14X14X11	1	-	-
-	FOO610B00	1,93	4,25	36OX36OX280	14X14X11	1	-	-
A140								
-	FOO610200	2,00	4,41	46OX20OX80	181X78X31	1	-	-
A70								
-	FOO603B00	1,25	2,76	36OX36OX280	14X14X11	1	-	-



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

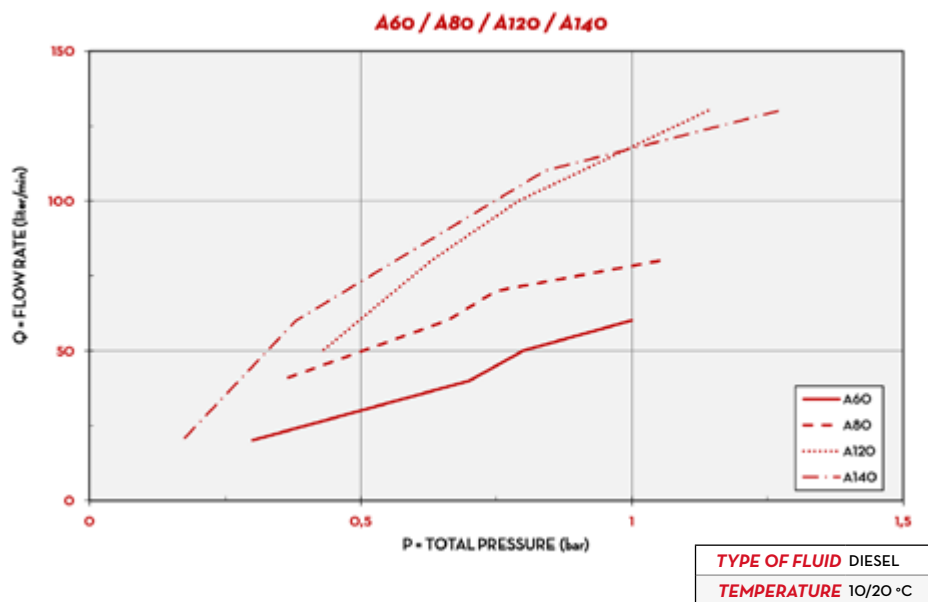

IN THE BOX

- A60/A80/A120/A140 NOZZLE
- INSTRUCTION MANUAL

DETAILS



AUTOMATIC STOP



F 1" SWIVEL

MATERIALS

- BODY: ALUMINIUM
- SEAL: VITON

TECHNICAL DATA

CODE		DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET		SPOUT
WITHOUT SWIVEL	WITH SWIVEL			L/MIN	GPM	WITHOUT SWIVEL BSP	WITH SWIVEL BSP	EXT. Ø MM
A60								
-	FOO603060	AUTOMATIC NOZZLE. A60 W/SWIVEL 3/4" BSP	 	60	16	F3/4"	F1"	24
-	FOO602020	AUTO. NOZZLE A60 W/SWIVEL 3/4" UNLEADED	 	60	16	F3/4"	F1"	20
-	FOO613A00	AUTO. NOZZLE A60 EN 13012 W/SWIVEL 3/4"		70	19	F3/4"	F1"	24
A80								
-	FOO604030	AUTOMATIC NOZZLE A80 W/SWIVEL 1" BSP	 	90	24	-	F1"	29
A120								
-	FOO610020	AUTOMATIC NOZZLE. A120 W/SWIVEL 1" BSP	 	120	32	-	F1"	29
-	FOO614A00	AUTO NOZZLE A120 EN 13012 W/SWIVEL 1"		120	32	-	F1"	29
-	FOO610B00	AUTOMATIC NOZZLE A120 W/SWIV. 1"BSP B100	 	120	32	-	F1"	29
A140								
-	FOO610200	AUTOMATIC NOZZLE. A140 W/SWIVEL 1" BSP		140	37	-	F1"	29
A70								
-	FOO603B00	AUTOMATIC NOZZLE A70 1" BSP B100	 	70	19	-	F1"	24