


PIUSI FILTER ELEMENT CFD 70-30 F0061101A-1

F0061101A-1

Replacement 30-micron filter element for Piusi CFD filter housings, rated for diesel and petrol at flows up to 150 L/min. Aluminium construction with Viton seals.

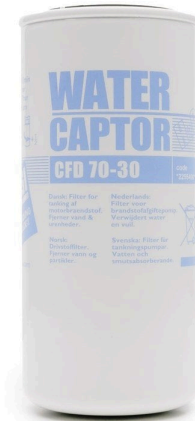

FEATURES

- 30-micron filtration
- Flow rate 70 to 150 L/min
- Operating pressure 3.5 bar
- Bursting pressure 10 bar
- 1" BSP connection
- Aluminium body with Viton seals
- Suits Piusi CFD filter housings

BENEFITS

- Protects pumps and nozzles from grit and debris
- Viton seals handle diesel and petrol without swelling
- Spin-on replacement, no filter media to load
- Fits most workshop and site dispensing setups

TECHNICAL SPECIFICATIONS

Flow Rate	70 to 150 L/min	Filtration	30 micron
Bursting Pressure	10 bar	Operating Pressure	3.5 bar
Connection	1" BSP	Materials	Aluminium body, Viton seals
Material	Aluminium	Suits	Piusi CFD filter housings

USE CASE & APPLICATION

- Workshop diesel dispensing
- Site fuel storage systems
- Mobile refuelling trailer filter maintenance
- Fleet vehicle refuelling stations