

PIUSI AUTOMATIC NOZZLE WITH SWIVEL PETROL 60LPM F00613020

F00613020

Auto shut-off petrol nozzle with swivel inlet, 60 L/min delivery, 1" BSP connection. Aluminium body with NBR seals for pump-grade fuel compatibility.



FEATURES

- Auto shut-off when tank fills
- Swivel inlet prevents hose twist
- Flow rate 60 L/min
- Connection 1" BSP
- Aluminium body
- NBR seals
- Weight 1.25 kg

BENEFITS

- No spills, nozzle stops automatically
- Swivel reduces hose wear and operator fatigue
- Fits standard 1" BSP hose assemblies
- Light enough for one-hand operation

TECHNICAL SPECIFICATIONS

Flow Rate	60ltr Per Min	Spout OD (mm)	21
Inlet	1" F BSP swivel		

USE CASE & APPLICATION

- Workshop petrol dispensing
- Mobile refuelling trailers
- Farm ULP bowzers
- Fleet fuel stations
- Marine and small engine refills



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

A60 / A140 ATEX

FEATURES

- AUTOMATIC
- READY TO USE
- STURDY DESIGN

Expressly engineered to meet the strictest requirements of the ATEX/IECEX regulations, the PIUSI A60/A140 ATEX is an automatic nozzle suitable to dispense fluids - such as gasoline, kerosene, diesel and others - in potentially explosive atmospheres. It is fitted with a structural component that automatically stops dispensing when the tank is full.

PERFORMANCE

UP TO 140 L/MIN	1" BSP
FLOW RATE	INLET
A60 Ø21MM	A140 Ø29MM
SPOUT	SPOUT



A60 ATEX



A140 ATEX

PACKAGING

CODE		WEIGHT		PACKAGING			BOXES/EUROPALLET	
WITHOUT SWIVEL	WITH SWIVEL	KG	LBS	MM	INCH	PCS/BOX		
A60 ATEX								
-	F00613020	1,25	2,76	460X200X80	181X78X31	1	-	-
A140 ATEX								
F22675000	-	2,00	4,41	460X200X80	181X78X31	1	-	-



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

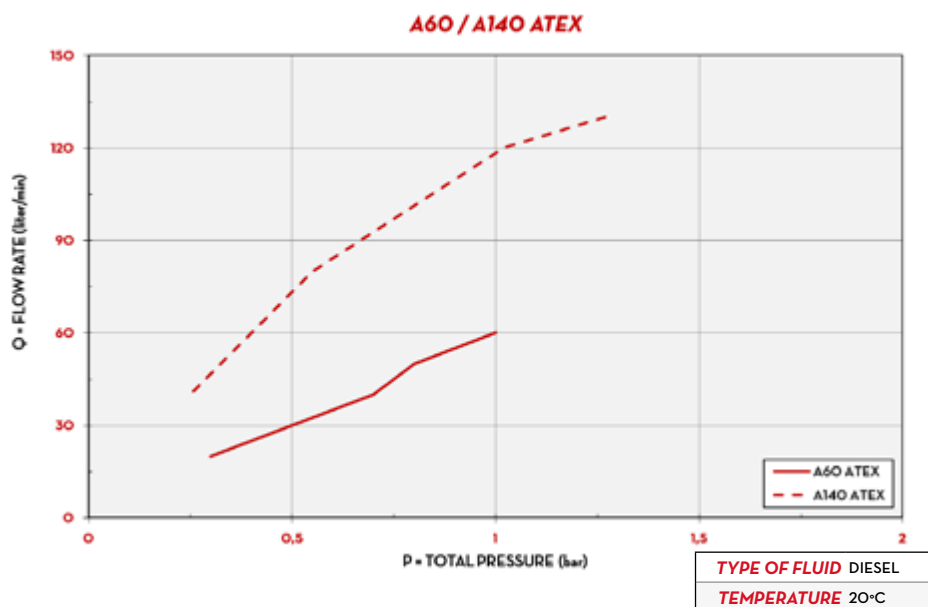

IN THE BOX

- A60 / A140 ATEX NOZZLE
- INSTRUCTION MANUAL

DETAILS



AUTOMATIC STOP



F1" SWIVEL (ONLY A60 ATEX)

MATERIALS

- BODY: ALUMINIUM
- SEAL: NBR

TECHNICAL DATA

TECHNICAL DATA								
CODE		DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET		SPOUT
WITHOUT SWIVEL	WITH SWIVEL			L/MIN	GPM	WITHOUT SWIVEL BSP	WITH SWIVEL BSP	EXT. Ø MM
A60 ATEX								
-	FOO613020	A6O ATEX	D G K	60	16	-	F1"	21
A140 ATEX								
F22675000	-	(EX) AUTOMATIC NOZZLE A140 W\OUT SWIVEL	D G K	140	37	F1"	-	29

ATEX AUTOMATIC NOZZLES