

PIUSI SELF 3000 MANUAL SHUT OFF NOZZLE 60LPM F00650020

F00650020

Manual petrol nozzle with swivel inlet. Aluminium body with Viton seals, 60 L/min flow, 1 inch BSP female connection. Basic unit that does the job.



FEATURES

- Manual
- Versatile
- High Efficiency
- Lever Protection

TECHNICAL SPECIFICATIONS

Flow Rate	60 L/min	Material	Aluminium
Connection	1 inch BSP female	Operation	Manual trigger control
Weight	0.7 kg	Fluid	Petrol (unleaded)
Swivel Inlet	Reduces hose wear		

USE CASE & APPLICATION

- Workshop petrol dispensing
- Fleet vehicle refuelling
- Generator and small plant fuelling
- Handheld bowser setups



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

SELF 2000 / SELF 3000

FEATURES

- MANUAL
- VERSATILE
- HIGH EFFICIENCY
- LEVER PROTECTION

The PIUSI SELF 2000 / SELF 3000 manual nozzles perform the maximum efficiency thanks to the low-flow resistance and the wide range of applications including transfer systems run by gravity. They are supplied with removable lever protection and connectors.



SELF 2000 DIESEL



SELF 3000 DIESEL/GASOLINE



KUNSTSTOFF-ZAPFVENTIL WASSER/DIESEL



PERFORMANCE

UP TO

150 L/MIN

FLOW RATE

20/25MM

OD SPOUT

SELF 2000 / SELF 3000

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
00063900A	0,7	1,5	400X250X200	16X11X7,8	1		
00064900A	0,7	1,5	400X250X200	16X11X7,8	1		
00064902A	0,7	1,5	400X250X200	16X11X7,8	1		
00065001A	0,7	1,5	400X250X200	16X11X7,8	1		
00065600A	0,7	1,5	400X250X200	16X11X7,8	1		
FO0641120	0,7	1,5	400X250X200	16X11X7,8	1		
FO0641130	0,7	1,5	400X250X200	16X11X7,8	1		
FO065000A	0,7	1,5	400X250X200	16X11X7,8	1		
FO0650020	0,7	1,5	400X250X200	16X11X7,8	1		
FO063000A	0,3	0,7	-	-	1		
FO0641B00	0,7	1,5	400X250X200	16X11X7,8	1		



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

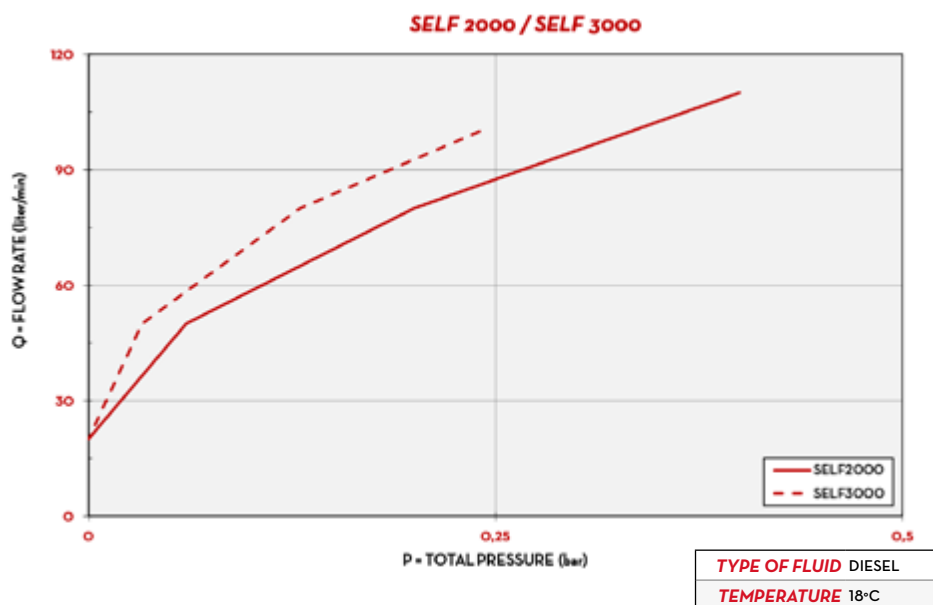

IN THE BOX

- SELF 2000/ SELF 3000 NOZZLE

DETAILS



LEVER PROTECTION



ROTATING SWIVEL

MATERIALS

SELF 2000 & SELF 3000

- BODY: ALUMINIUM
- SEAL: NBR70SH

PLASTIC NOZZLE

- BODY: PP+FV
- SEAL: NBR

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET		SPOUT	
			L/MIN	GPM	SWIVEL (THREADS)	Ø BSP	EXT. Ø MM	
00063900A	SELF 2000 1" BSP UNLEADED	D G O	120	32	INTERNAL	1" BSP	20	
00064900A	SELF 2000 3/4" BSP	D O	120	32	INTERNAL	3/4" BSP	25	
00064902A	SELF 2000 3/4" BSP UNLEADED	D G O	120	32	INTERNAL	3/4" BSP	20	
00065001A	SELF 3000 1" BSP UNLEADED	D O G	150	40	INTERNAL	1" BSP	20	
00065600A	SELF 2000 1" BSP SPOUT 25 MM	D O	120	32	INTERNAL	1" BSP	25	
FO0641120	SELF 2000 W/HOSE TAIL D.20 SPOUT 25 MM	D O	120	32	INTERNAL	3/4" BSP	25	
FO0641130	SELF 2000 1" BSP	D O	120	32	INTERNAL	1" BSP	25	
FO065000A	SELF 3000 1" BSP LEADED SPOUT	D O	150	40	INTERNAL	1" BSP	25	
FO0650020	SELF 3000 1" BSP LEADED SPOUT S/P	D G O W	150	40	INTERNAL	1" BSP	25	
FO063000A	PLASTIC NOZZLE BLACK W/SWIVEL 1" BSP	D O W	80	21	INTERNAL	1" BSP	34	
FO0641B00	SELF 2000 1" BSP B100	O	120	32	INTERNAL	1" BSP	20	