



CABINET PUMP



EN. Dispenser

The sturdy cabinet in anti-corrosive coating metal sheet resistant to atmospheric agents, equipped with key lock, to restrict non authorized use of dispensing unit. The mushroom-type emergency button fitted inside the pump acts as a safety switch, when needed, and also prevents current from passing to the pump when the front panel is close. The pump is located inside on vibration damper supports. Several models with different features are available

Features

- | | |
|--------------|--------------------|
| • flow range | 45,60,80,100 l/min |
| • voltage | 12V - 24V - 230V |
| • in/out | 1" x 1" BSP-G |
| • nozzle | automatic |
| • fluids | diesel |

Options

- upon request 115V engine



ciclo di lavoro - duty cycle



motore - engine



Mascherina personalizzabile*

* subordinata ad un minimo d'ordine annuale


Customizable faceplate*

* subject to minimum annual ordered quantity





Ingombri - Overall Dimensions (mm)

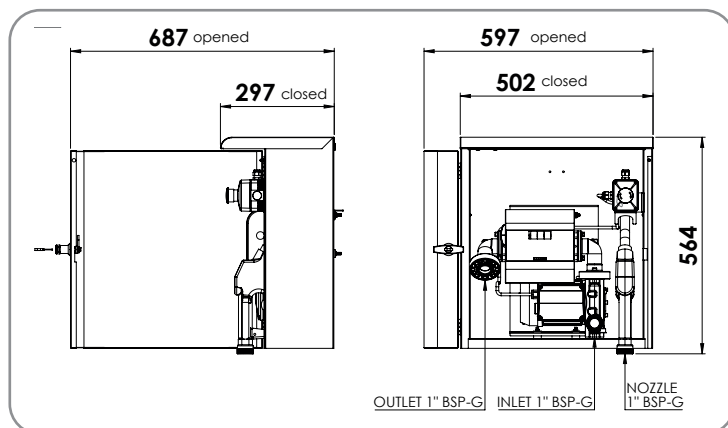

Kit filtro
Filter Kit
pag. 63



Ref.	Model	l/ min	V			LxWxH(mm)	Kg	N° boxes europallet	N° boxes europallet
AR50212	ARMADILLO 50	50	12	60l/min	4m, Ø19mm	590X390X590	25	8	12
AR50412	ARMADILLO 50	50	24	60l/min	4m, Ø19mm	590X390X590	25	8	12
AR6A212	ARMADILLO 60	60	12	60l/min	4m, Ø19mm	590X390X590	29	8	12
AR6A412	ARMADILLO 60	60	24	60l/min	4m, Ø19mm	590X390X590	29	8	12
AR6A012	ARMADILLO 60	60	230	60l/min	4m, Ø19mm	590X390X590	28	8	12
AR80014	ARMADILLO 80	80	230	120l/min	4m, Ø25mm	590X390X590	34	8	12
AR10014	ARMADILLO 100	100	230	120l/min	4m, Ø25mm	590X390X590	34	8	12