



CAR FILLING



DISPENSERS



PUMPS



METERS



NOZZLE METERS



NOZZLES

SUZZARABLU BOX



FEATURES

- EASY TO INSTALL
- READY TO USE
- BUILT-IN LOCK

The PIUSI Suzzarablu Box is specifically designed for wall or tank installation. Is equipped with a metallic box which allows to lock up all the equipment.

PERFORMANCE

UP TO

32 L/MIN

FLOW RATE

AC V. / Hz

230/50

VOLTAGE

POWER

± 1%

ACCURACY

20 MIN

DUTY CYCLE



SUZZARABLU BOX



PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FOO20196B	25	55,1	575X320X607	22,6X23,9	1



FILTRATION

FLUID
MONITORING

HOSE REELS



ACCESSORIES



MERCHANDISE

PIUSI

AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER




WINDSCREEN


INDEX

CHARTS

SUZZARABLU AC

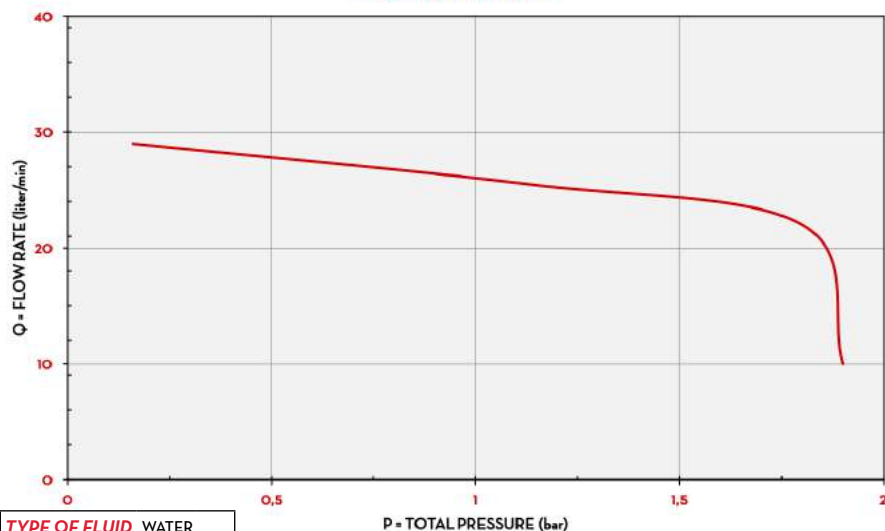

DIMENSIONS

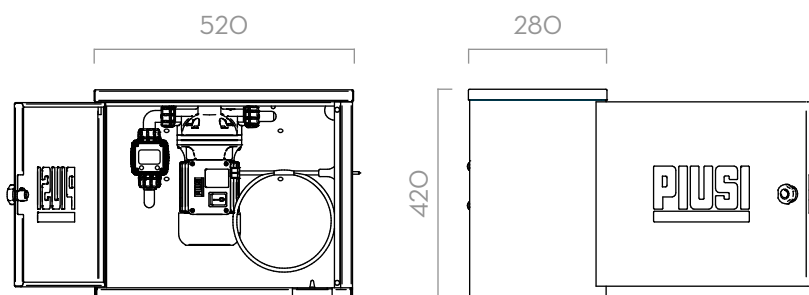

Dimensions expressed in millimeters

IN THE BOX

- SUZZARABLU PUMP AC UNIT
- K24 METER
- NOZZLE
- INSTRUCTION MANUAL

DETAILS



K24



AUTOMATIC NOZZLE



FOOT VALVE

MATERIALS

- PUMP:
SUZZARABLU PUMP AC PAG. 40
- METER:
K24 METER PAG. 64
- NOZZLE:
SUZZARABLU A60 PAG. 86

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			METER	NOZZLE	HOSE LENGTH
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	MOD.	TYPE	
FOO20196B	SUZZARABLU BOX	 	32	8,5	230/50	400	1,95	K24	SUZZARABLU NOZZLE A60	6 M

SUZZARABLU BOX

FIXED

25