



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES



WASTE OIL EQUIPMENTS

GREASE HOSE REEL

FEATURES

- HEAVY DUTY SPRING
- HAND PROTECTION (ON REQ.)
- WIDE RANGE OF PRODUCTS
- LONG LASTING
- STEEL HUB
- HIGH PRESSURE

The PIUSI GREASE HOSE REEL is an automatic open hose reel specific for grease. Manufactured accordingly to the most demanding requirements, it is suitable for all grease heavy duty applications.



PERFORMANCE

| | |
|-----------------------|-------------|
| MAX 400 BAR | 15M |
| OPERATING PRESSURE | HOSE LENGTH |



OPEN GREASE HOSE REEL
(hand protection on request)

PACKAGING

| CODE | WEIGHT | | PACKAGING | | |
|---------------------|--------|------|-------------|------------|---------|
| | KG | LBS | MM | PCS/PALLET | PCS/BOX |
| WITHOUT HOSE | | | | | |
| HN40151400A | 14 | 30,8 | 550X200X540 | | 1 |
| HN40153800A | 14 | 30,8 | 550X200X540 | | 1 |
| WITH HOSE | | | | | |
| HA40151400 | 27 | 60 | 550X260X540 | | 1 |
| HA40153800A | 25 | 55 | 550X260X540 | | 1 |



FILTRATION



FLUID MONITORING



TANK MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER




WINDSCREEN


INSTALLATION

Different ways to install PIUSI's hose reels: they can be easily placed wherever you need them without any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any condition.


ROOF INSTALLATION

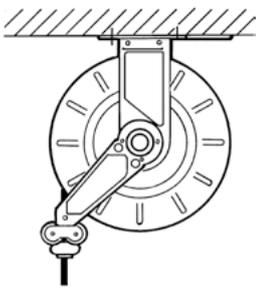

WALL INSTALLATION

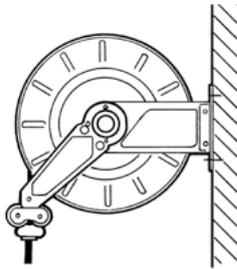


GROUND INSTALLATION

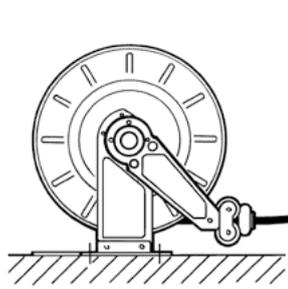

DIMENSIONS

MODEL OPEN HOSE REEL SMALL

| | |
|---|-----|
| A | 475 |
| B | 460 |
| C | 102 |
| D | 150 |
| E | 196 |
| F | 150 |
| G | 150 |
| H | 12 |

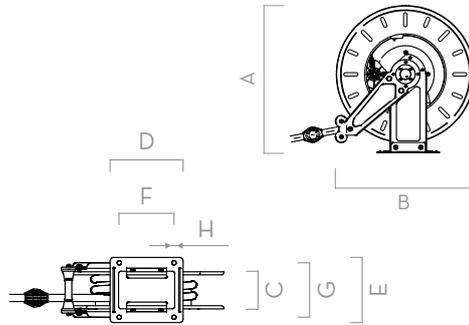

Dimensions expressed in millimeters

IN THE BOX

- GREASE HOSE REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL



DETAILS



AUTOMATIC HOSE REEL



4 ROLLS HOSE GUIDE



DIFFERENT INSTALLATIONS



PROTECTION ON REQUEST

MATERIALS

- BODY: CAST IRON
- HUB: SYNTHETIC STEEL
- TUBE: RUBBER

TECHNICAL DATA

| CODE | DESCRIPTION | FLUIDS TYPE | HOSE | MAX WORKING PRESSURE | PRESSURE DROP | INLET WITH SWIVEL | OUTLET HOSETAIL | HOSE MAX LENGTH BOUND | HOSE LENGTH |
|---------------------|---------------------------------------|-------------|------|----------------------|-------------------|-------------------|-----------------|-----------------------|-------------|
| | | | BSP | BAR | BAR | BSP | BSP | M | M |
| WITHOUT HOSE | | | | | | | | | |
| HN40151400A | OPEN HOSE REEL 1/4" * 15MT SMALL | | 1/4" | 400 | - | 1/4" FEMALE | 1/4" FEMALE | 15 | - |
| HN40153800A | OPEN HOSE REEL 3/8" * 15MT SMALL | | 3/8" | 400 | - | 3/8" FEMALE | 3/8" FEMALE | 15 | - |
| WITH HOSE | | | | | | | | | |
| HA40151400 | OPEN HOSE REEL 1/4" * 15MT HOSE SMALL | | 1/4" | 400 | 160 @ 600 GR/MIN* | 1/4" FEMALE | 1/4" FEMALE | - | 15 |
| HA40153800A | OPEN HOSE REEL 3/8" * 15MT HOSE SMALL | | 3/8" | 400 | 140 @ 600 GR/MIN* | 3/8" FEMALE | 3/8" FEMALE | - | 15 |

(*) PRESSURE DROP FOR GREASE NLGI 2.5 (**) PRESSURE DROP FOR GREASE NLGI 2

GREASE HOSE REEL